





# ASSEMBLY INSTRUCTION

## NC\*FRX & NC\*MRX | XLR Cable Connector

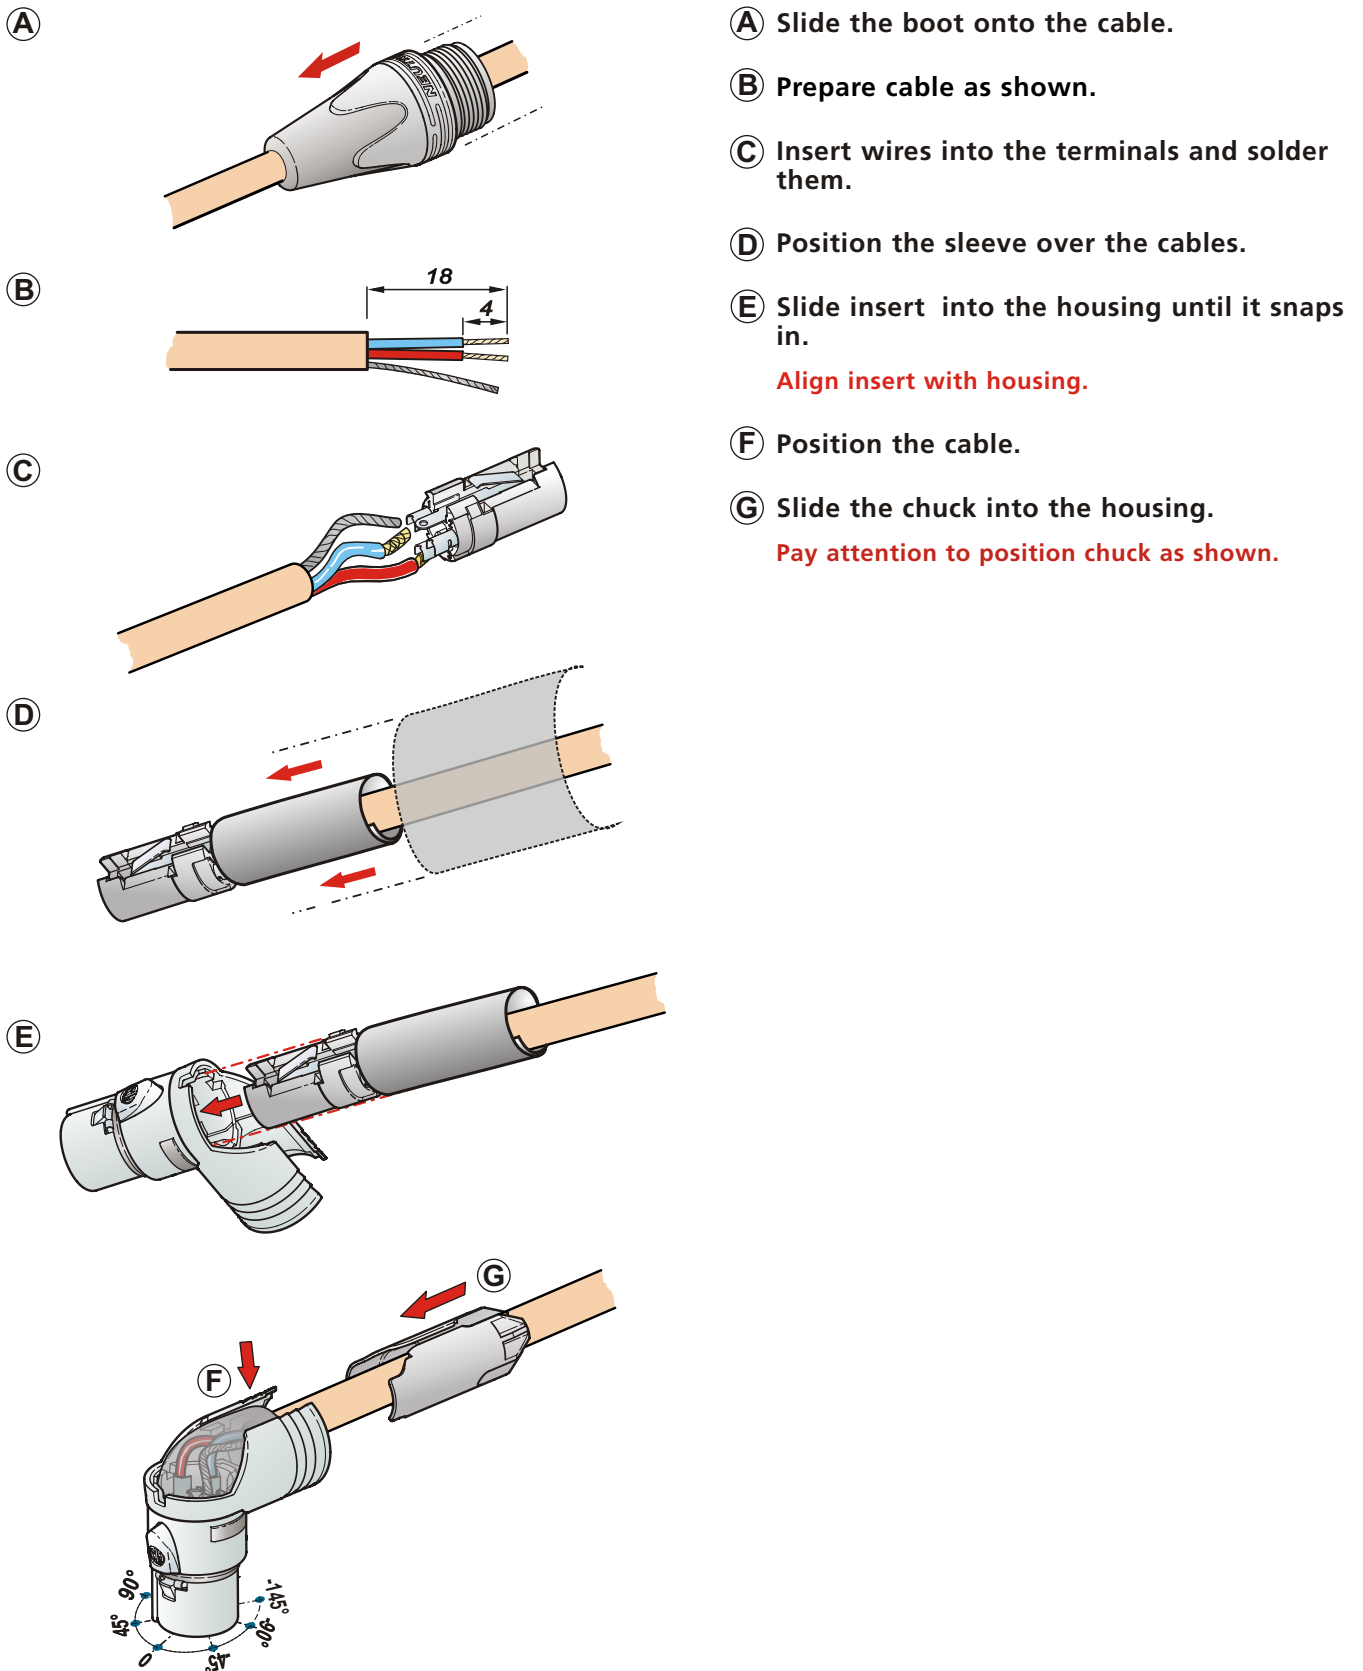

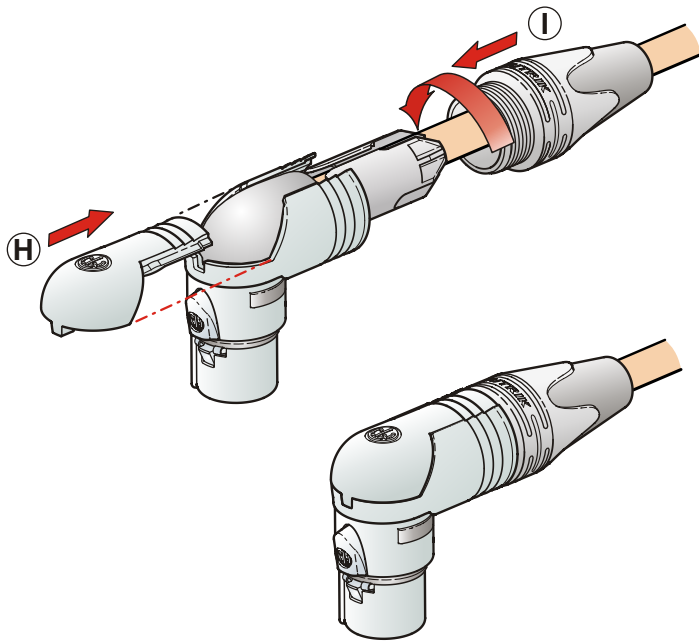


**H** Position the cover.

Before placing the cover choose the orientation of cable outlet by turning housing.

**I** Finish the assembly by turning the bushing onto the connector.

### Disassembly of the insert

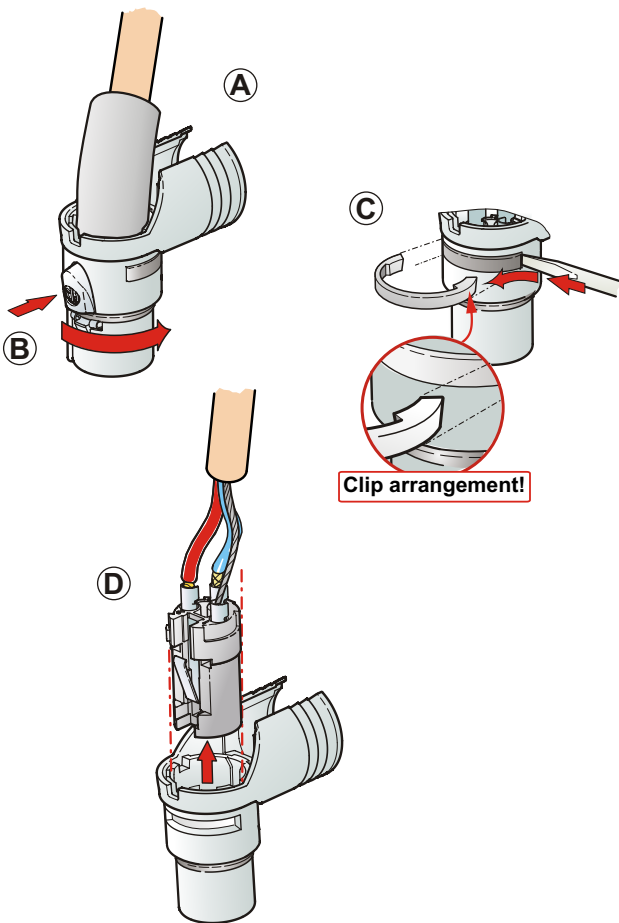

**A** Remove cover and chuck.

**B** Push latch and turn housing approx. a half turn until housing can be separated.

**C** Lift the locking clip by help of a screw driver.

**D** Remove insert.