

## Accessories

### Steel rope 1400x6mm



**No. 5801044A**..... silver

- Suitable for installing light loads • With two loops • 6 mm quick link (form A) included

Technical specifications:	
Max. load WLL (5-fold):	360 kg
Temperature range:	-40° C to +100° C
Weight:	0.3 kg

### Steel rope 1000x4mm with thimbles



**No. 5801048G** ..... silver  
**No. 5801049C** ..... black

- Suitable for installing and securing loads above persons
- Test report according to DIN EN 10204 as download

Technical specifications:	
Max. load WLL (5-fold):	175 kg
Max. load BGV C1 (12-fold):	70 kg
Max. load (safety):	15 kg

### Lifting rope with shackle -400kg



**No. 58010490** ..... 1000x10mm  
**No. 58010491** ..... 1500x10mm  
**No. 58010492** ..... 2000x10mm

- Round strand rope 6x19 with fibre core • Suitable for installing and securing loads • 16 mm shackle included in the delivery • Test report according to DIN EN 10204 as download

Technical specifications:	
Max. load WLL (5-fold):	1050 kg
Max. load BGV C1 (12-fold):	450 kg
Max. load (safety):	100 kg

### Cable glider type 50SVII-M12BG black



**No. 58010570**

Technical specifications:	
Workload 4 mm:	80 kg
Workload 5 mm:	130 kg
Diameter:	25 mm
Thread:	M12
Thread length:	17 mm
Length:	70 mm
Weight:	0.130 kg

### Cable glider type 50SVII-RM12 black



**No. 58010574**

Technical specifications:	
Workload 4 mm:	80 kg
Workload 5 mm:	130 kg
Diameter:	25 mm
Thread:	M12
Thread length:	17 mm
Length:	106 mm
Weight:	0.215 kg


### Cable glider type 80SVII-GK20/40 black



**No. 58010580**

Technical specifications:	
Workload 6 mm:	190 kg
Workload 8 mm:	330 kg
Diameter:	40 mm
Thread:	M20
Thread length:	30 mm
Length:	190 mm
Weight:	0.515 kg

### Roping eye with backing ring

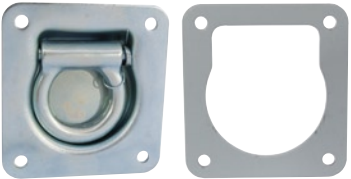

**No. 30001140**

Technical specifications:	
WLL (5-fold):	275 kg
Inner diameter:	35 mm
Outer diameter:	55 mm
Dimensions:	102 x 95 x 22 mm
Weight:	approx. 370 g

### Steel rope 600x3mm with thimbles



**No. 5801048F** ..... silver  
**No. 5801049A** ..... black

- Suitable for installing and securing loads above persons
- Test report according to DIN EN 10204 as download

Technical specifications:	
Max. load WLL (5-fold):	100 kg
Max. load BGV C1 (12-fold):	40 kg
Max. load (safety):	5 kg

### Steel rope 1000x6mm with thimble



**No. 5801048L** ..... silver  
**No. 5801049E** ..... black

- Suitable for installing and securing loads above persons
- Test report according to DIN EN 10204 as download

Technical specifications:	
Max. load WLL (5-fold):	400 kg
Max. load BGV C1 (12-fold):	165 kg
Max. load (safety):	35 kg

### RIGPORT Steel rope



**No. 60003861**

### Spannfix 27cm (12 pcs.)



**No. 58010590** ..... white  
**No. 58010591** ..... black

### Cable glider type 50SVII-GK14/28W black



**No. 58010572**

Technical specifications:	
Workload 4 mm:	80 kg
Workload 5 mm:	130 kg
Diameter:	25 mm
Thread:	M12
Thread length:	17 mm
Length:	122 mm
Weight:	0.350 kg

### Cable glider type 80SVII-M20BG black



**No. 58010578**

Technical specifications:	
Workload 6 mm:	190 kg
Workload 8 mm:	330 kg
Diameter:	40 mm
Thread:	M20
Thread length:	30 mm
Length:	114 mm
Weight:	0.515 kg

### Cable glider type 80SVII-RM20 black



**No. 58010582**

Technical specifications:	
Workload 6 mm:	190 kg
Workload 8 mm:	330 kg
Diameter:	40 mm
Thread:	M20
Thread length:	30 mm
Length:	155 mm
Weight:	0.865 kg

### Roping eye, snap back 102x95x22mm



**No. 30001150** ..... chrome  
**No. 30001151** ..... black

Technical specifications:	
WLL (5-fold):	275 kg
Inner diameter:	35 mm
Outer diameter:	55 mm
Dimensions:	102 x 95 x 22 mm
Weight:	approx. 370 g